





PRINCIPAL DIMENSIONS - mm

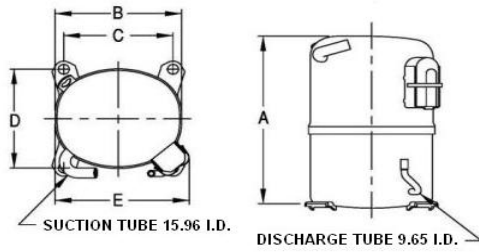


A: 324	B: 223	C: 191	D: 191	E: 239
--------	--------	--------	--------	--------

SCHEMATIC WIRING DIAGRAM 3 PHASE

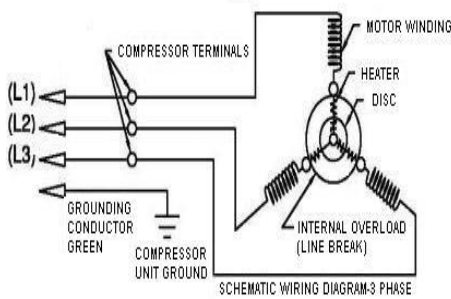

SCHEMATIC WIRING DIAGRAM -

MOUNTING KIT

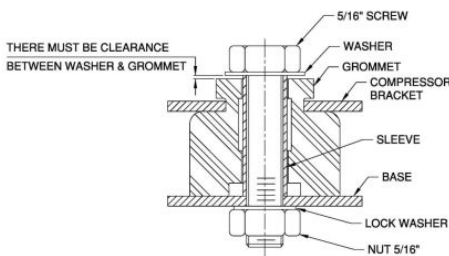

Electrical : 380-420 V/50 Hz., 460 V/60 Hz. 3 Phase

Nominal Performance

Capacity	1,671 / 1,905 Watts
	5,701 / 6,500 BTU/Hr
	1,437 / 1,638 Kcal/Hr
Power Input	1,130 / 1,310 Watts
Locked Rotor Amps	24.00 / 24.00 Amps
Max Continuous Current	- / - Amps
Rated Load Amps	2.30 / 2.40 Amps
COP	1.48 / 1.45 Watts / Watts
EER	5.05 / 4.96 BTU/W-Hr

Testing Conditions

Condensing Temperature	54.40 °C	129.9 °F
Evaporating Temperature	-23.30 / - °C	-9.9 / - °F
Liquid Temperature	32.20 °C	90.0 °F
Return Gas Temperature	32.20 °C	90.0 °F
Ambient Temperature	32.20 °C	90.0 °F

Application

Evaporating Temp. Range	LBP	@ -34.40 °C to -12.20 °C (-29.9° F to 10.0° F)
	Heat Pump	- °C to - °C (-° F to -° F)
Refrigerant	R404A	
Refrigerant Flow Control	Capillary Tube	
Compressor Cooling	Fan	

Compressor and Motor data

Compressor Type	Reciprocating
Displacement	43.10 cc.
Oil Type	Polyolester Oil
Oil Charge	1,067 cc.
Motor Type	3 PHASE ; 2 Pole 2,850 / 3,500 r/m
Voltage Range	342-456/394-552 Volts 50/60 Hz.
Winding Resistance at 25 °C	
L1-L2	6.95 Ohms
L1-L3	6.95 Ohms
L2-L3	6.76 Ohms
Weight with Oil	27.29 Kg.
Weight with Oil and Accessories	28.09 Kg.

Electrical Components

Motor Protector

Type	Internal Overload
Model Number	4042KGE658-2
Open / Close	105-115 / 52-70 °C
1st Cycle trip at 25 °C	19.00 Amps(main) - Amps(start)

Motor Starter

Type	-
Model Number	-
Pick Up (max.)	- Volts
Drop Out (min.)	- Volts
Terminal Cover	KGM 901-2
Start Capacitor	- µF - VAC.
Disch Resistor for Start Cap	-
Run Capacitor	- µF - VAC.

Mounting Kit

Rubber Grommet	4007KGM905-2
Sleeve Grommet	4023KGM903-2
Washer	-

Since we are constantly improving our product , the specification are subject to change without notice.

REV. DATE
25-05-16

C / N No.
0146/16

Certificate Marks

www.alamko.by



RoHS